

FREQUENCY STABILITY	
SHORT TERM STABILITY OVER TEMPERATURE RANGE	
-40 to 55°C*: (after 15mn switch on and with a slope of 5°C/h)	$\leq \pm 3E-9 / 50s^*$
LONG TERM AGING 5 YEARS INCLUDING CALIBRATION:	
	$< \pm 4.5 ppm$
SUPPLY VOLTAGE $\pm 0.2V$:	$< \pm 0.1 ppm$
POWER SUPPLY	
SUPPLY INPUT:	$V_{CC} = 5 V \pm 0.2 V^*$
INPUT CURRENT :	$< 10 mA @ 55^\circ C^*$
INPUT CURRENT :	$< 35 mA @ 25^\circ C^*$
INPUT CURRENT :	$< 70 mA @ -20^\circ C^*$
FREQUENCY CONTROL RANGE	
CONTROL VOLTAGE:	<i>Not applicable, pin 1 must be connected to ground (see note 2)</i>
INTERNAL CALIBRATION	$< \pm 1 ppm^*$
OUTPUT	
OUTPUT SIGNAL:	<i>Clipped sine wave</i>
LEVEL:	$> 1V_{pp}$
LOAD:	$1k\Omega // 10pF \pm 10\%$
ENVIRONMENT	
OPERABLE TEMP. RANGE:	$-40 to 85^\circ C$
STORAGE TEMP. RANGE:	$-65 to 125^\circ C$
VIBRATION:	$10 to 2000 Hz / 10 g$
SHOCK:	$500 g, 5 ms, \frac{1}{2} sine$
PACKAGE:	$DIL 14, 4 pins, GND to case$
PACKAGE HEIGHT:	$8 mm$ <i>(packaging info)</i>
WARM-UP	
$\Delta F/F$:	<i>See Frequency stability</i>
CURRENT:	$< 330mA$ during 10s (@ $-40^\circ C$)
MISCELLANEOUS	
SIGMA TAU:	$< 5 E-10$ 0.1 s to 30 s <i>Typical 5 E-11 @ 1 s</i>
PHASE NOISE (BW = 1Hz): <i>(typical, @ 10MHz in static conditions)</i>	10 Hz : - 90 dBc / Hz 100 Hz : - 120 dBc / Hz 1 kHz : - 130 dBc / Hz 10 kHz : - 130 dBc / Hz
* Customer's specification on request	


Note 2

On request:

Possibility of frequency adjustment with control voltage.

MARKING EXAMPLE

Micro Crystal		Micro Crystal	
OCXOVT-SAR		Type	Spec No.
10.150625 MHz	09.25	Frequency	Date Code
○	12	○ (PIN 1)	Piece No.

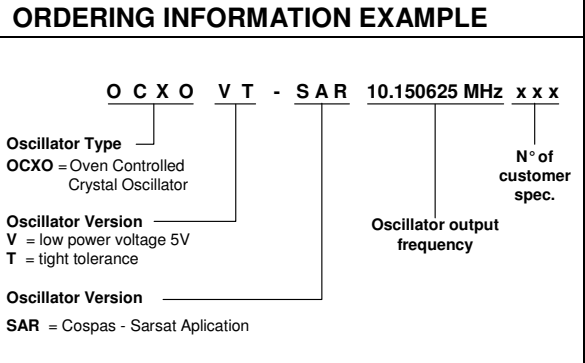

STANDARD FREQUENCIES (MHz)			
10.150625	10.150700	12.688281	12.688375


DATE:	October 2009	Revision No.: 3
		Page 1/2

In accordance with our policy of continuous development and improvement, we reserve the right to modify the design or the specifications of our products without prior notice.

Headquarters:	Micro Crystal AG Mühlestrasse 14 CH-2540 Grenchen Switzerland	Tel.	+41 32 655 82 82
		Fax	+41 32 655 80 90
		Internet	www.microcrystal.ch
		Email	sales@microcrystal.ch

Application and Test Circuit:

Adjustment with voltage

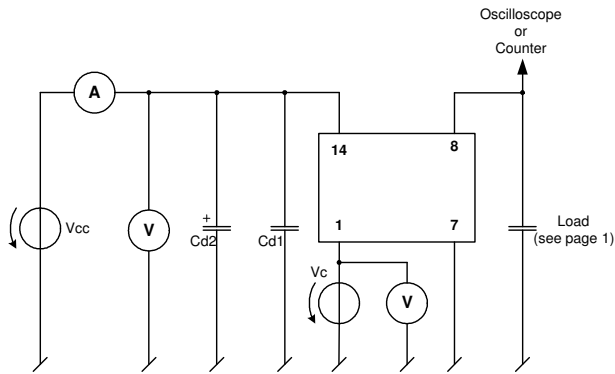

Adjustment with resistor

