

FREQUENCY STABILITY OVER:	
OPERATING TEMP. RANGE :	see note 1
LONG TERM AGING 1ST YEAR:	< ±0.3 ppm *
10 YEARS:	< ±2.5 ppm *
SUPPLY VOLTAGE ± 0.5 V	
≤ 20 MHz	< ± 0.025 ppm
> 20 MHz	< ± 0.1 ppm
LOAD ±10%:	< ±0.01 ppm
POWER SUPPLY	
SUPPLY INPUT:	V _{cc} = 12 V ± 0.5 V *
INPUT CURRENT :	< 30 mA @ +30 °C *
INPUT CURRENT :	< 45 mA @ -20 °C *
FREQUENCY CONTROL RANGE	
CONTROL VOLTAGE:	see note 2
FREQUENCY DEVIATION:	> ±2.5 ppm *
RESPONSE SLOPE:	positive
OUTPUT	
OUTPUT SIGNAL:	HC-MOS compatible
SYMMETRY:	40 (min.) / 60 (max.) % @ V _{cc} / 2 *
RISE AND FALL TIME:	tr < 7ns if < 7 ns *
LEVEL „0“ AND „1“:	< 0.4 V > 5V - 0.5 V
FAN OUT (LOAD):	10 LS
ENVIRONMENT	
OPERABLE TEMP. RANGE:	-40 to +85 °C
STORAGE TEMP. RANGE:	-65 to +125 °C
VIBRATION:	10 to 2000 Hz / 10 g
SHOCK	2000 g, 0.3 ms, ½ sine
PACKAGE:	DIL 14, 4 pins, GND to case
PACKAGE HEIGHT:	8 mm (see packaging info)
WARM-UP	
ΔF/F:	within spec after 60s @ 30 °C *
CURRENT:	< 250 mA during 10s
MISCELLANEOUS	
SHORT TERM STABILITY:	< 1 E-10 0.1 s to 30 s Typical 5 E-11 @ 1 s
PHASE NOISE (BW = 1Hz):	10 Hz: -90 dBc / Hz (typical, @ 10MHz in static conditions)
	100 Hz: -120 dBc / Hz
	1 KHz: -130 dBc / Hz
	10 KHz: -135 dBc / Hz
* Customer's specification on request	

NOTE 1	
TEMP. RANGE *	SCOCXOT-AR1, AV5 0 to +60 °C
STABILITY *	±0.025 ppm (0.05 ppm peak to peak)
TEMP. RANGE *	SCOCXOT-BR1, BV5 -20 to +70 °C
STABILITY *	±0.05 ppm (0.1 ppm peak to peak)
TEMP. RANGE *	SCOCXOT-CR1, CV5 -40 to +85 °C
STABILITY *	±0.1 ppm (0.2 ppm peak to peak)

NOTE 2	
ADJUSTMENT WITH RESISTOR	SCOCXOT-AR1, BR1, CR1 0 to 10 kΩ (connected to ground)
INPUT IMPEDANCE	> -4.7 kΩ
ADJUSTMENT WITH VOLTAGE	SCOCXOT-AV5, BV5, CV5 0.5 to 5 V
INPUT IMPEDANCE	> 47 kΩ


MARKING EXAMPLE			
Micro Crystal		Micro Crystal	
SCOCXOT-BV5	09.25	Type	Spec No.
20.000 MHz	12	Frequency	Date Code
○		○ (PIN 1)	Piece No.

ORDERING INFORMATION EXAMPLE			
S C O C X O T - B V 5 20 MHz x x x			
Oscillator Type	SCOCXO = Low g sensitivity Oven Controlled Crystal Oscillator	Oscillator output frequency	N° of customer spec.
Oscillator Version	T = tight tolerance	Frequency Adjustment	R1 = external resistor V5 = voltage 5V Y = custom spec.
Temperature Range	A = 0 to +60 °C; +/-0.05ppm B = -20 to +70 °C; +/-0.1ppm C = -40 to +85 °C; +/-0.2ppm X = custom spec.		


STANDARD FREQUENCIES (MHz)					
10.0000	12.8000	16.0000	16.3840	19.4400	20.0000
26.0000	40.0000	50.0000	52.0000		

Application and Test Circuit:

Adjustment with voltage

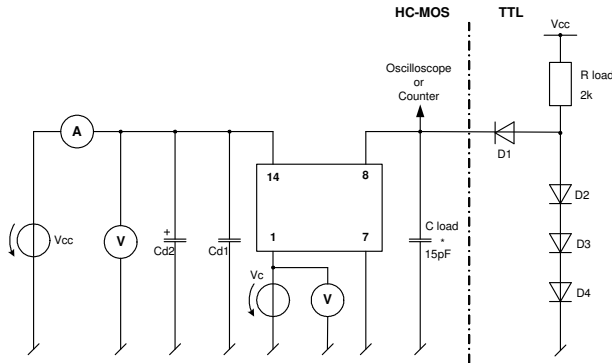


Adjustment with resistor

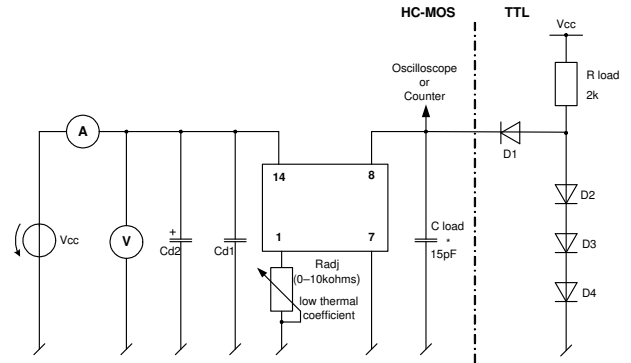


Waveform Output:

Waveshape TTL

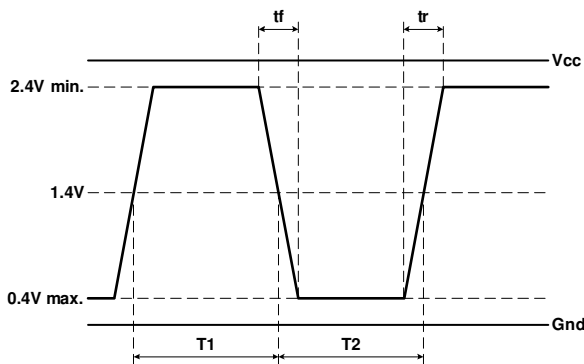

Waveshape HC-MOS

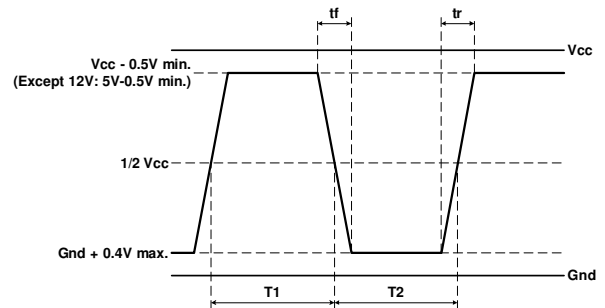

$$Duty\ Cycle = 100 \times \frac{T1}{T1 + T2} [\%]$$